




4

3

2

1

MECHANICALS

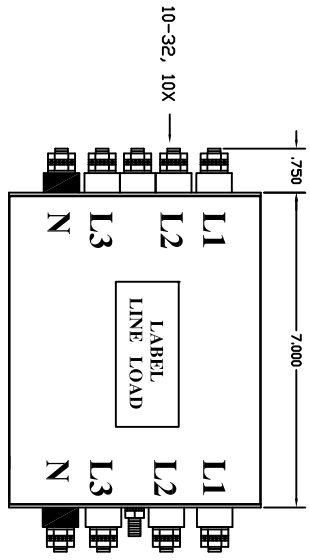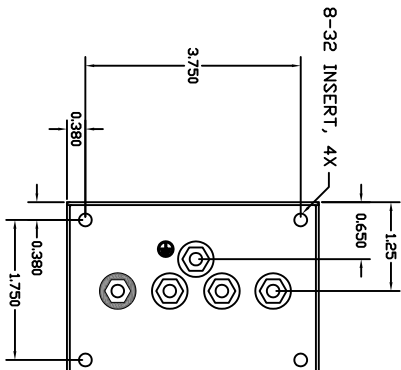


SPECIFICATIONS

MAX VOLTAGE: 480VAC
 MAX CURRENT / PHASE: 30A
 LINE FREQUENCY: 50/60HZ
 AMBIENT: 50C
 CLIMATIC CLASS: 25/100/21
 HIPOT (L-G): 3KVDC
 TYP. WEIGHT: 4 LBS
 TYP LEAKAGE CURRENT: <2mA
 SAFETY: ccsAus, UR, EN133200

ALL DIMENSIONS ARE IN INCH

SCHEMATIC

INSERTION LOSS, dB

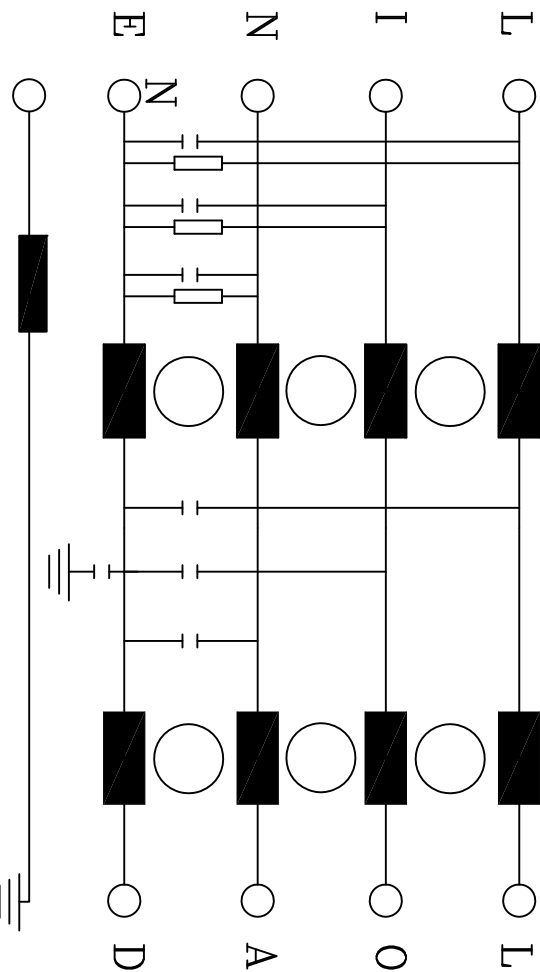

Freq(MHz)	0.1	0.5	1.0	10	30	100
CM	22	45	74	75	62	50
DM	26	80	72	60	50	---

RP

PART NAME:

RPC1195-30

CROSS TO JMK: KK-0902-30

DRWG. NO. 1000-331

A

B

C

D

A

B

C

D

4

3

2

1