

4



3

2

1

MECHANICALS

SPECIFICATIONS

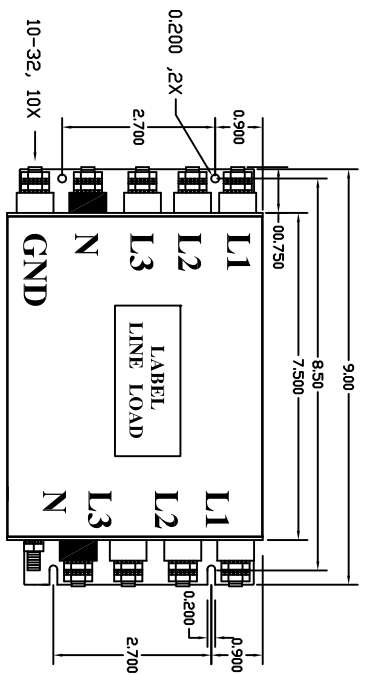


ALL DIMENSIONS ARE IN INCH

MAX VOLTAGE: 480VAC
 MAX CURRENT / PHASE: 30A
 LINE FREQUENCY: 50/60HZ
 AMBIENT: 50C
 CLIMATIC CLASS: 25/100/21
 HIPOT (L-G): 3KVDC
 TYP. WEIGHT: 3.8 LBS
 TYP LEAKAGE CURRENT: <2mA
 SAFETY: cCSAus, UR, EN133200

SCHEMATIC

INSERTION LOSS, dB

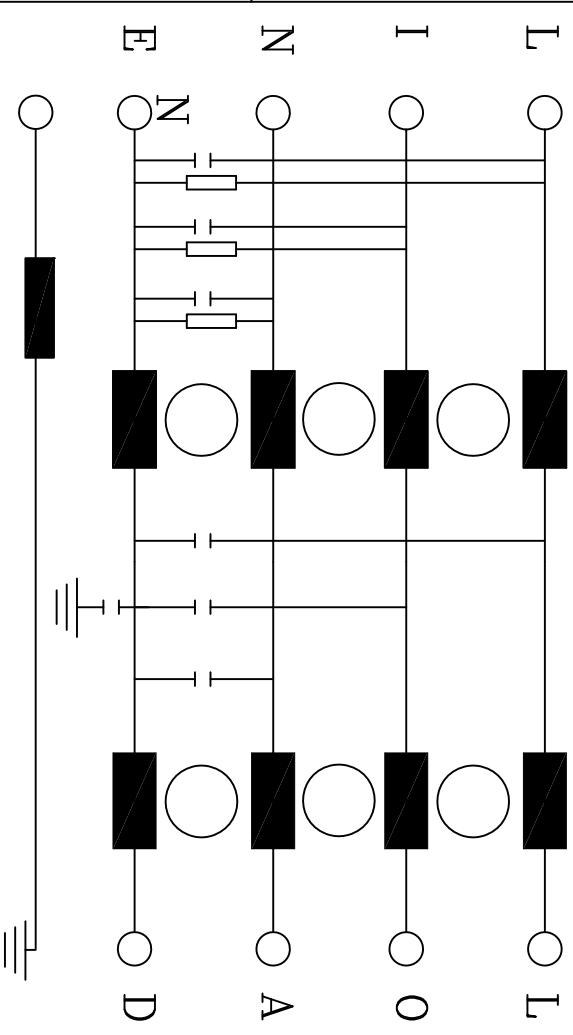

Freq(MHz)	0.1	0.5	1.0	10	30	100
CM	22	44	62	74	60	50
DM	24	60	62	60	60	---

RP

PART NAME:

RPC1197-30

CROSS TO JMK: KK-0902-30B

DRWG. NO. 1000-333

4

3

2

1