


SCHEMATIC

SPECIFICATIONS

INSERTION LOSS, dB

ALL DIMENSIONS ARE IN INCH

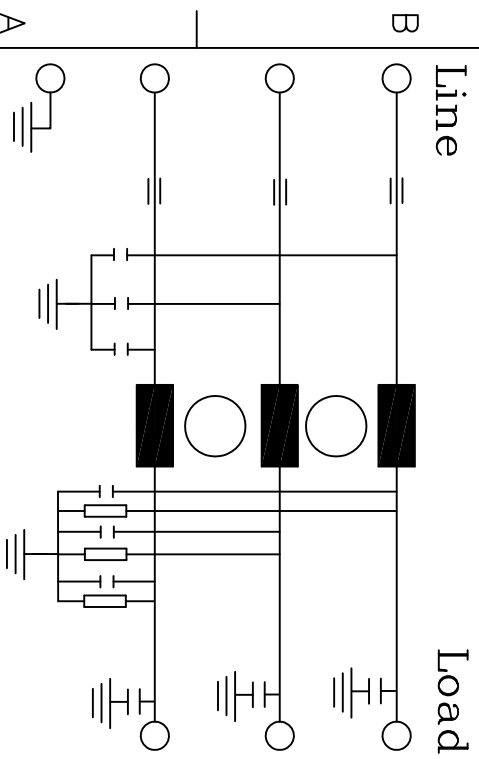

MAX VOLTAGE: 480VAC
 MAX CURRENT / PHASE: 63A
 LINE FREQUENCY: 50/60HZ
 AMBIENT: 50C
 HIPOT (L-G): 2250VDC
 WEIGHT: 16 LBS
 CALL FOR ADDITIONAL
 MOUNTING LAYOUTS

Freq(MHz)	0.01	0.1	1.0	10	30	100	1000
CM	30	50	90	90	90	90	90
DM	45	100	100	100	100	100	---

RP

PART NAME:

RPWC5014-63

CROSS TO CORCOM: 63ADT6

DRWG. NO. 1400-015

4

3

2

1

A

B

C

D

A

B

C

D